
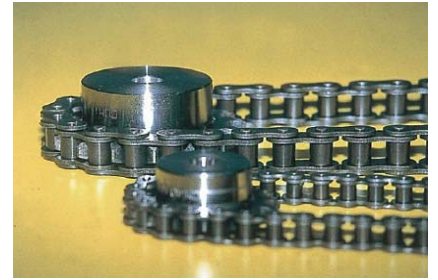


# OCM ECONOMICAL LINE

## ANSI Roller Chain

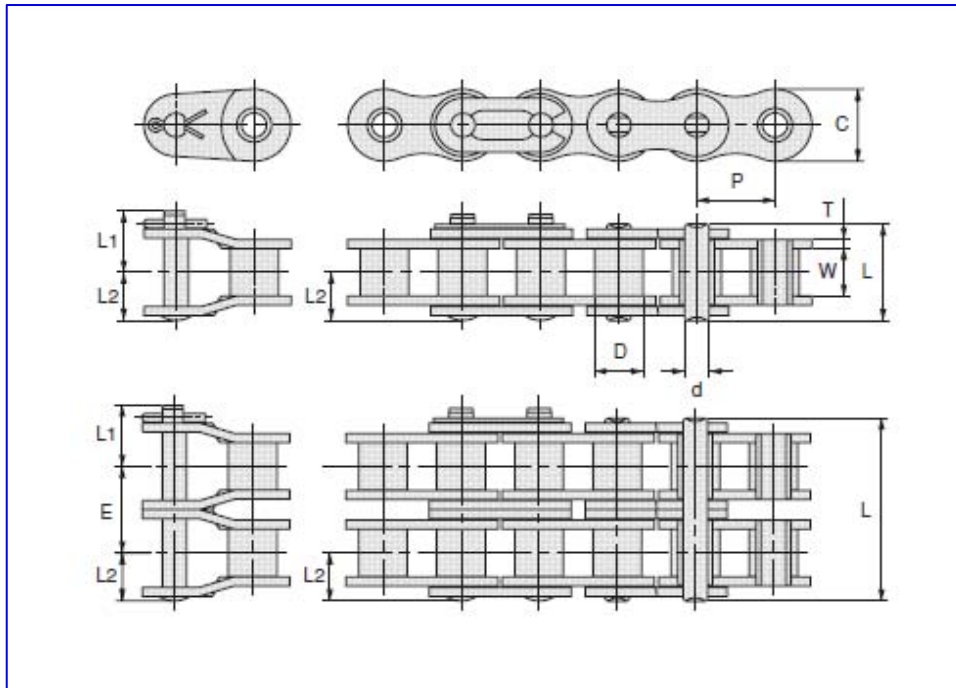

OCM MX	Pitch P	Roller Diam D	Width between L.P. W	Link Plate		Pin					Minimum Tensile Strength kN	Average Weight Kg/m
				C	T	d	L	L1	L2	E		
40-1R	12.700	7.92	7.85	12.07	1.50	3.98	17.80	9.95	8.90	14.38	13.80	0.64
40-2R							32.30				27.60	1.28
50-1R	15.875	10.16	9.40	15.09	2.03	5.09	21.80	12.00	10.90	18.11	21.80	1.05
50-2R							39.90				43.60	2.01
60-1R	19.050	11.91	12.57	18.08	2.42	5.96	26.90	14.75	13.45	22.78	31.10	1.54
60-2R							49.80				62.30	3.06
80-1R	25.400	15.88	15.75	24.13	3.25	7.94	33.50	19.25	16.75	29.29	55.60	2.70
80-2R							62.70				111.20	5.32
100-1R	31.750	19.05	18.90	30.18	4.00	9.54	41.10	23.95	20.55	35.76	86.70	3.90
100-2R							76.86				173.50	7.85