


OCM ECONOMICAL LINE

BS/DIN Roller Chain

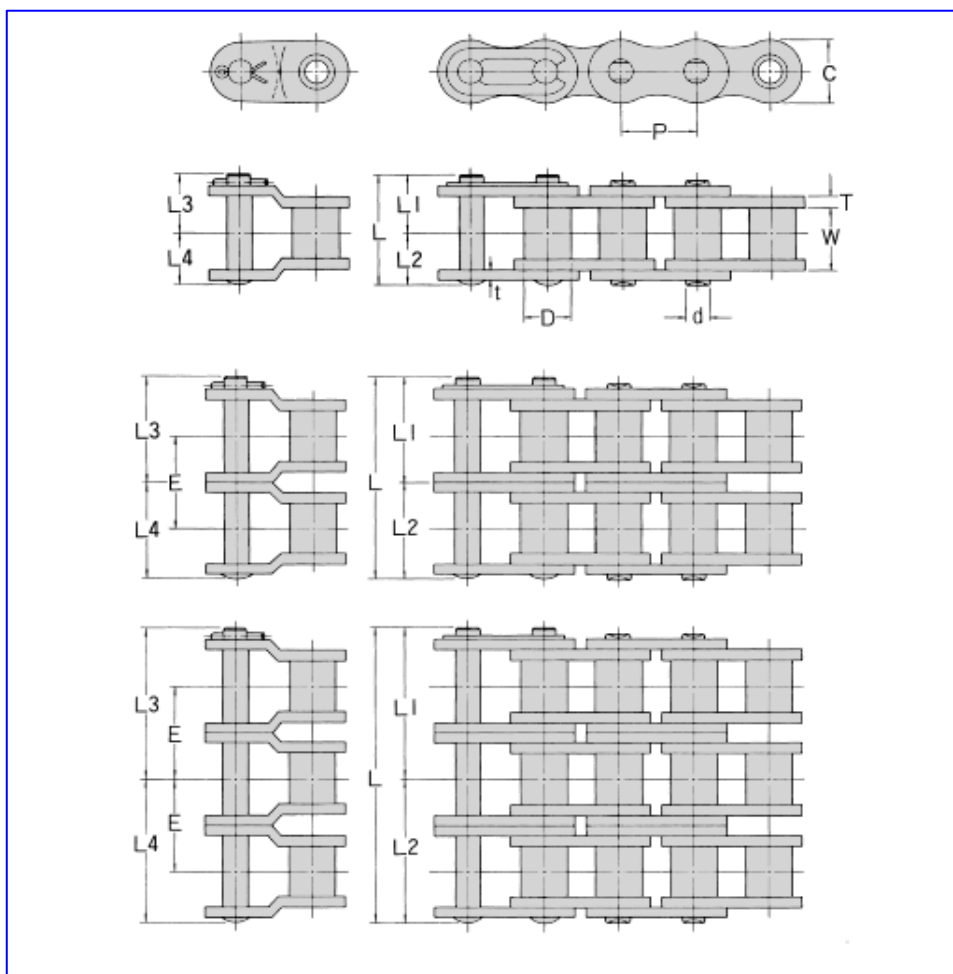

OCM MX	Pitch P	Roller Diam D	Width between L.P. W	Link Plate			Pin					Minimum Tensile Strength kN	Average Weight Kg/m	
				C	T	t	d	L	L1	L2	L3+L4			E
06B-1								14.40	7.65	6.75	14.60		8.90	0.44
06B-2	9.525	6.35	5.72	8.26	1.30	1.30	3.28	24.47	12.57	11.90	24.70	10.24	16.90	0.85
06B-3								34.50	17.50	17.00	34.70		24.90	1.26
08B-1								18.50	10.00	8.50	18.80		17.80	0.75
08B-2	12.700	8.51	7.75	11.81	1.60	1.60	4.45	32.50	17.00	15.50	33.80	13.92	31.10	1.45
08B-3								46.40	23.95	22.45	47.80		44.50	2.15
10B-1								21.05	11.25	9.80	21.35		22.20	1.05
10B-2	15.875	10.16	9.65	14.73	1.70	1.70	5.08	37.65	19.55	18.10	39.65	16.59	44.50	2.05
10B-3								54.20	27.80	26.40	56.30		66.70	3.15
12B-1								24.35	13.00	11.35	25.05		28.90	1.28
12B-2	19.050	12.07	11.68	16.13	1.85	1.85	5.72	43.80	22.70	21.10	46.50	19.46	57.80	2.56
12B-3								63.30	32.45	30.85	66.20		86.70	3.89
16B-1								37.95	19.90	18.05	39.05		60.00	2.72
16B-2	25.400	15.88	17.02	21.08	4.15	3.10	8.28	69.90	35.90	34.00	73.90	31.88	106.00	5.45
16B-3								101.80	51.85	49.95	106.00		160.00	8.06
20B-1								45.50	23.90	21.60	45.43		95.00	3.60
20B-2	31.750	19.05	19.56	26.42	4.50	4.00	10.19	81.95	42.10	39.85	81.88	36.45	170.00	7.40
24B-1								58.00	31.30	26.70	60.25		160.00	6.70
24B-2	38.100	25.40	25.40	33.40	6.00	4.80	14.63	106.36	55.48	50.88	108.61	48.36	280.00	13.90