


# OCM MINI CHAIN


Chain No. **25H** Pitch • 0.250inch / 6.35mm

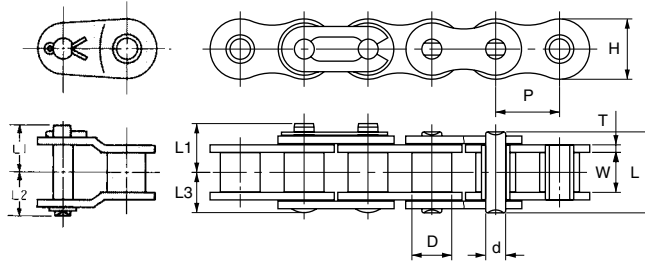

UNIT Upper:inch  
Beneath:mm

OCM Chain No.	Pitch	Roller Diam.	Width between L.P.	Link Plate		Pin Diam.	Pin				Trans Pitch	Average Tensile Strength	Max. Working Load	Approx Weight
	P	D	W	H	T	d	L	L1	L2	L3	E	Lb/kg	Lb/kg	Lb/ft kg/m
OCM25H	0.250 6.35	0.130 3.3	0.126 3.2	0.230 5.85	0.039 1.0	0.091 2.30	0.350 8.9	0.209 5.3	0.185 4.7	0.169 4.3	-	1147 520	209 95	0.107 0.16

- Chain is rollerless.
  - Connecting link is special type.
- Note : Dimensions subject to change. Certified dimensions furnished upon request.



TYPE B

UNIT:mm

No. of Teeth	Pitch Diam.	Outside Diam.	Stock Bore	Max. Bore	Hub Diam.	Length thru Bore	Average Weight
	PD	OD	HD	HD	BD	BL	kg
10	20.55	23.0	6	8	13	12	0.01
11	22.54	25.0	6	9	15	12	0.02
12	24.53	27.5	6	11	17	12	0.02
13	26.53	29.5	6	13	19	12	0.03
14	28.54	31.5	8	13	20	14	0.04
15	30.54	33.5	8	15	22	14	0.04
16	32.55	35.5	8	15	24	14	0.05
17	34.56	37.5	8	17	26	14	0.06
18	36.57	39.5	8	17	28	14	0.07
19	38.58	41.5	8	20	30	16	0.09
20	40.59	43.5	8	20	32	16	0.11
21	42.61	45.5	10	25	34	16	0.12
22	44.62	47.5	10	25	36	16	0.13
23	46.63	50.0	10	25	38	16	0.14
24	48.65	52.0	10	25	40	18	0.18
25	50.66	54.0	10	25	40	18	0.18
26	52.68	56.0	10	25	40	18	0.19
27	54.70	58.0	10	25	40	18	0.19
28	56.71	60.0	10	25	40	18	0.19
29	58.73	62.0	10	25	40	18	0.20
30	60.75	64.0	10	25	40	18	0.20
31	62.77	66.0	10	25	40	18	0.21
32	64.78	68.0	10	25	40	18	0.21
33	66.80	70.0	10	25	40	18	0.22
34	68.82	72.0	10	25	40	18	0.22
35	70.84	74.0	10	25	40	18	0.23

- Teeth of sprockets are not induction hardened.
  - The max. bore showed above is general. Please determine your max. bore in view of your application and operating conditions.
- Note: Dimensions subject to change. Certified dimensions furnished upon request.