


OCM ANSI ROLLER CHAIN

Chain No. **120** Pitch • 1.500inch / 38.10mm

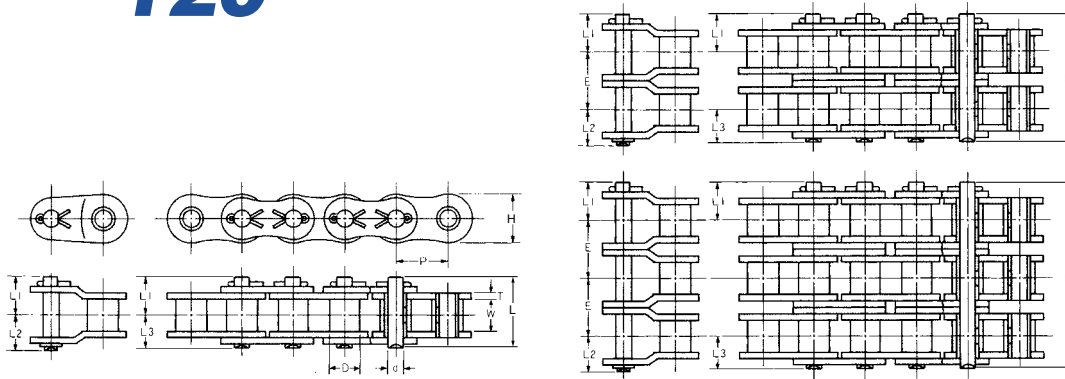

UNIT Upper:inch
Beneath:mm

OCM Chain No.	ANSI No.	Pitch P	Roller Diam. D	Width between L.P. W	Link Plate		Pin Diam. d	Pin				Trans Pitch E	Average Tensile Strength Lb/kg	Max. Working Load Lb/kg	Approx Weight Lb/ft kg/m
					H	T		L	L1	L2	L3				
OCM120	120	1.500	0.876	1.007	1.425	0.189	0.438	2.124	1.119	1.071	0.989	1.789	37,044	7,277	4.135
		38.10	22.23	25.55	36.2	4.8	11.11	53.9	28.4	27.2	25.1	45.4	16,800	3,300	6.2
OCM120-2	120-2	1.500	0.876	1.007	1.425	0.189	0.438	3.897	1.119	1.071	0.989	1.789	74,088	12,370	8.137
		38.10	22.23	25.55	36.2	4.8	11.11	98.9	28.4	27.2	25.1	45.4	33,600	5,610	12.2
OCM120-3	120-3	1.500	0.876	1.007	1.425	0.189	0.438	5.685	1.119	1.071	0.989	1.789	111,132	18,191	12.206
		38.10	22.23	25.55	36.2	4.8	11.11	144.3	28.4	27.2	25.1	45.4	50,400	8,250	18.3
OCM120-4	120-4	1.500	0.876	1.007	1.425	0.189	0.438	7.474	1.119	1.071	0.989	1.789	148,176	24,012	16.342
		38.10	22.23	25.55	36.2	4.8	11.11	189.7	28.4	27.2	25.1	45.4	67,200	10,890	24.5
OCM120-5	120-5	1.500	0.876	1.007	1.425	0.189	0.438	9.263	1.119	1.071	0.989	1.789	185,220	28,378	20.410
		38.10	22.23	25.55	36.2	4.8	11.11	235.1	28.4	27.2	25.1	45.4	84,000	12,870	30.6
OCM120-6	120-6	1.500	0.876	1.007	1.425	0.189	0.438	11.052	1.119	1.071	0.989	1.789	222,264	33,472	24.546
		38.10	22.23	25.55	36.2	4.8	11.11	280.5	28.4	27.2	25.1	45.4	100,800	15,180	36.8

Note: Dimensions subject to change. Certified dimensions furnished upon request.

HORSEPOWER RATINGS SINGLE STRAND ROLLER CHAIN

No. of Teeth Small Spkt.	REVOLUTIONS PER MINUTE-SMALL SPROCKET																								
	10	25	50	100	150	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100
11	1.37	3.12	5.83	10.9	15.7	20.3	29.2	37.9	46.3	54.6	46.3	37.9	31.8	27.1	23.5	20.6	18.3	16.4	14.8	13.4	12.2	11.2	10.4	9.59	0
12	1.50	3.43	6.40	11.9	17.2	22.3	32.1	41.6	50.9	59.9	52.8	43.2	36.2	30.9	26.8	23.5	20.9	18.7	16.8	15.3	13.9	12.8	11.8	10.9	0
13	1.64	3.74	6.98	13.0	18.8	24.3	35.0	45.4	55.5	65.3	59.5	48.7	40.8	34.9	30.2	26.5	23.5	21.0	19.0	17.2	15.7	14.4	13.3	12.3	0
14	1.78	4.05	7.56	14.1	20.3	26.3	37.9	49.1	60.1	70.8	66.5	54.4	45.6	39.0	33.8	29.6	26.3	23.5	21.2	19.2	17.6	16.1	14.9	8.94	0
15	1.91	4.37	8.15	15.2	21.9	28.4	40.9	53.0	64.7	76.3	73.8	60.4	50.6	43.2	37.4	32.9	29.1	26.1	23.5	21.3	19.5	17.0	16.5	0	0
16	2.05	4.68	8.74	16.3	23.5	30.4	43.8	56.8	69.4	81.8	81.3	66.5	55.7	47.6	41.2	36.2	32.1	28.7	25.9	23.5	21.5	19.7	18.2	0	0
17	2.19	5.00	9.33	17.4	25.1	32.5	46.8	60.6	74.1	87.3	89.0	72.8	61.0	52.1	45.2	39.6	35.2	31.5	28.4	25.8	23.5	21.6	19.9	0	0
18	2.33	5.32	9.92	18.5	26.7	34.6	49.8	64.5	78.8	92.9	97.0	79.4	66.5	56.8	49.2	43.2	38.3	34.3	30.9	28.1	25.6	23.5	11.3	0	0
19	2.47	5.64	10.5	19.6	28.3	36.6	52.8	68.4	83.6	98.5	105	86.1	72.1	61.6	53.4	46.8	41.5	37.2	33.5	30.4	27.8	25.5	0	0	0
20	2.61	5.96	11.1	20.7	29.9	38.7	55.8	72.2	88.3	104	114	92.9	77.9	66.5	57.6	50.6	44.9	40.1	36.2	32.9	30.0	27.5	0	0	0
21	2.75	6.28	11.7	21.9	31.5	40.8	58.8	76.2	93.1	110	122	100	83.8	71.6	62.0	54.4	48.3	43.2	39.0	35.4	32.3	29.6	0	0	0
22	2.90	6.60	12.3	23.0	33.1	42.9	61.8	80.1	97.9	115	131	107	89.9	76.7	66.5	58.4	51.8	46.3	41.8	37.9	34.6	16.6	0	0	0
23	3.04	6.93	12.9	24.1	34.8	45.0	64.9	84.0	103	121	139	115	96.1	82.0	71.1	62.4	55.3	49.5	44.6	40.5	37.0	0	0	0	0
24	3.18	7.25	13.5	25.3	36.4	47.1	67.9	88.0	108	127	146	122	102	87.4	75.8	66.5	59.0	52.8	47.6	43.2	39.4	0	0	0	0
25	3.32	7.58	14.1	26.4	38.0	49.3	71.0	91.9	112	132	152	130	109	92.9	80.6	70.7	62.7	56.1	50.6	45.9	41.3	0	0	0	0
26	3.47	7.91	14.8	27.5	39.7	51.4	74.0	95.9	117	138	159	138	115	98.6	85.4	75.0	66.5	59.5	53.7	48.7	26.6	0	0	0	0
28	3.76	8.57	16.0	29.8	43.0	55.7	80.2	104	127	150	172	154	129	110	95.5	83.8	74.3	66.5	60.0	54.4	0	0	0	0	0
30	4.05	9.23	17.2	32.1	46.3	60.0	86.4	112	137	161	185	171	143	122	106	92.9	82.4	73.8	66.5	42.4	0	0	0	0	0
32	4.34	9.90	18.5	34.5	49.6	64.3	92.6	120	147	173	199	188	158	135	117	102	90.8	81.3	73.3	0	0	0	0	0	0
35	4.78	10.9	20.3	38.0	54.7	70.9	102	132	162	190	219	215	180	154	133	117	104	92.9	47.7	0	0	0	0	0	0
40	5.52	12.6	23.5	43.9	63.2	81.8	118	153	187	220	253	263	220	188	163	143	127	59.5	0	0	0	0	0	0	0
Lubri- cation	I			II						III															

See page 14, for lubrication type.
When your selection fall in the right part of the dotted line, consult us.
For horsepower ratings of multiple strand, multiply the horsepower above by multiple strand factor on page 11.
Note: Dimensions subject to change. Certified dimensions furnished upon request.