

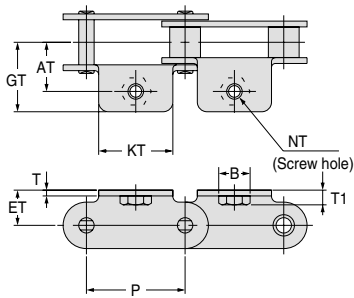


# THREADED HOLE ATTACHMENT


Sunk attachment is suitable where attachment wears quickly from sliding.

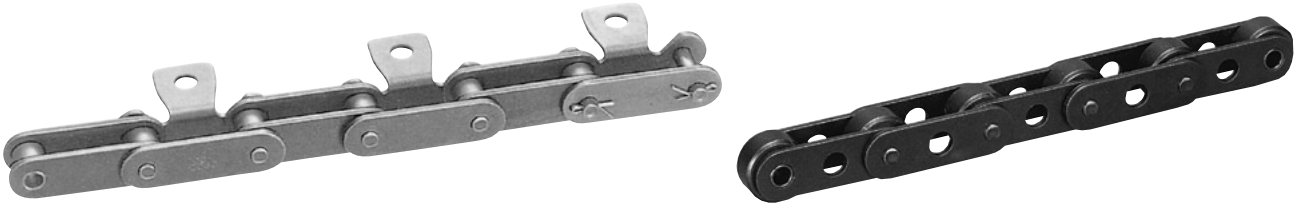


TYPE PA-1




TYPE PA-2

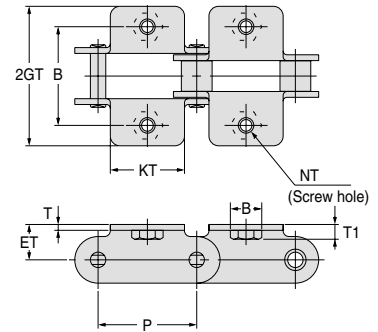


TYPE PK-1



TYPE PK-2

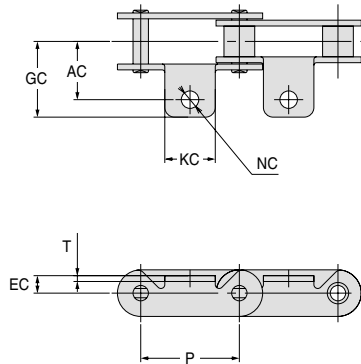

TYPE CA-1



TYPE GK-1

UNIT Upper:inch  
Beneath:mm

OCM Chain No.	Pitch		Pin													Link Plate T	Additional Weight Per Attachment Lb/kgf		
	P	KT	KC	NT	NC	NG	L	AT	AC	ET	EC	GT	GC	B	T1		TA	TK	CA
C2040-C2042	1.000	0.752	0.512		0.177	0.161	0.374	0.500	0.591	0.358	0.177	0.780	0.768	0.319	0.150	0.059	0.007	0.013	0.002
	25.4	19.1	13	M4	4.5	4.1	9.5	12.7	15	9.1	4.5	19.8	19.5	8.1	3.8	1.5	0.003	0.006	0.001
C2050-C2052	1.250	0.937	0.630		0.217	0.205	0.469	0.626	0.709	0.437	0.197	0.965	0.945	0.362	0.201	0.079	0.013	0.026	0.004
	31.75	23.8	16	M5	5.5	5.2	11.9	15.9	18	11.1	5	24.5	24	9.2	5.1	2	0.006	0.012	0.002
C2060H-C2062H	1.500	1.126	0.748		0.205	0.244	0.563	0.843	0.906	0.579	0.244	1.240	1.398	0.453	0.287	0.126	0.037	0.075	0.013
	38.1	28.6	19	M6	5.2	6.2	14.3	21.4	23	14.7	6.2	31.5	35.5	11.5	7.3	3.2	0.017	0.034	0.006
C2080H-C2082H	2.000	1.500	-		-	0.323	0.752	1.094	-	0.752	-	1.602	-	0.591	0.339	0.157	0.082	0.163	-
	50.8	38.1	-	M8	-	8.2	19.1	27.8	-	19.1	-	40.7	-	15	8.6	4	0.037	0.074	-

CA-1 is not available for C2080H and C2082H.