

STANDARD CHAIN

28B

General Dimensions


Unit : mm

ISO Chain NO.	DIN Chain NO.	Pitch	Roller Diameter max	Width Between Inner Plates min	Pin Diameter max	Plate Thickness max		Inner Plate Depth max	Outer Plate Depth max
		P	Dr	W	D	T1	T2	H	h
28B	28B	44.45	27.94	30.99	15.90	6.3	7.5	37.08	37.08

Dimensions of strands

Unit : mm

Chain NO.	Pin Length					Transverse Pitch C	Average Tensile Strength KN	ISO Tensile Strength min KN	Weight Per Meter Kg/m
	L max	Lc max	L1 max	L2 max	L3 max				
28B-1	65.10	70.00	32.55	37.45	74.60	59.56	223.60	200.00	9.60
28B-2	124.70	129.57	62.35	67.22	136.97		407.50	360.00	18.90
28B-3	184.3	189.17	92.15	97.02	196.57		610.00	530.00	28.36

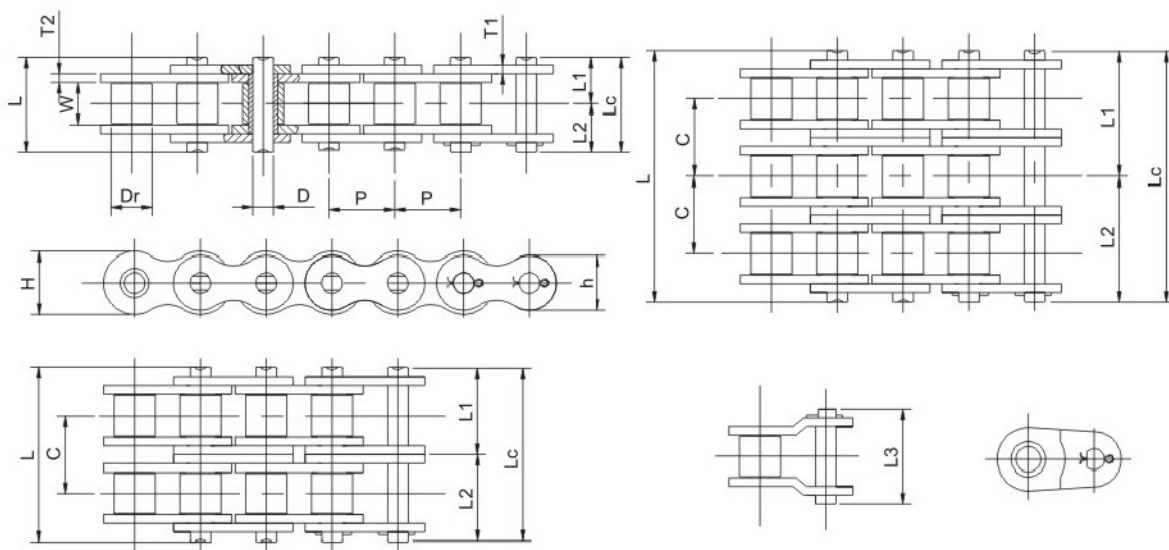

32B

General Dimensions

Unit : mm

ISO Chain NO.	DIN Chain NO.	Pitch	Roller Diameter max	Width Between Inner Plates min	Pin Diameter max	Plate Thickness max		Inner Plate Depth max	Outer Plate Depth max
		P	Dr	W	D	T1	T2	H	h
32B	32B	50.8	29.21	30.99	17.81	6.3	7.0	42.29	42.29

Dimensions of strands

Unit : mm

Chain NO.	Pin Length					Transverse Pitch C	Average Tensile Strength KN	ISO Tensile Strength min KN	Weight Per Meter Kg/m
	L max	Lc max	L1 max	L2 max	L3 max				
32B-1	67.40	71.40	33.70	37.7	75.10	58.55	278.20	250.00	10.34
32B-2	126.00	129.97	63.00	66.97	136.87		510.30	450.00	20.28
32B-3	184.50	188.50	92.25	96.25	195.40		771.20	670.00	30.18