


STANDARD CHAIN

40B		General Dimensions					Unit : mm			
ISO Chain NO.	DIN Chain NO.	Pitch	Roller Diameter max	Width Between Inner Plates min	Pin Diameter max	Plate Thickness max		Inner Plate Depth max	Outer Plate Depth max	
		P	Dr	W	D	T1	T2	H	h	
40B	40B	63.5	39.37	38.1	22.89	8.0	8.5	52.96	52.96	

Dimensions of strands						Unit : mm			
Chain NO.	Pin Length					Transverse Pitch	Average Tensile Strength	ISO Tensile Strength min	Weight Per Meter
	L max	Lc max	L1 max	L2 max	L3 max	C	KN	KN	Kg/m
40B-1	82.60	86.35	41.30	45.05	90.90	72.29	388.20	355.00	16.64
40B-2	154.90	158.67	77.45	81.22	165.57		718.60	630.00	32.54
40B-3	227.20	230.97	113.60	117.37	237.87		1100.00	950.00	48.68

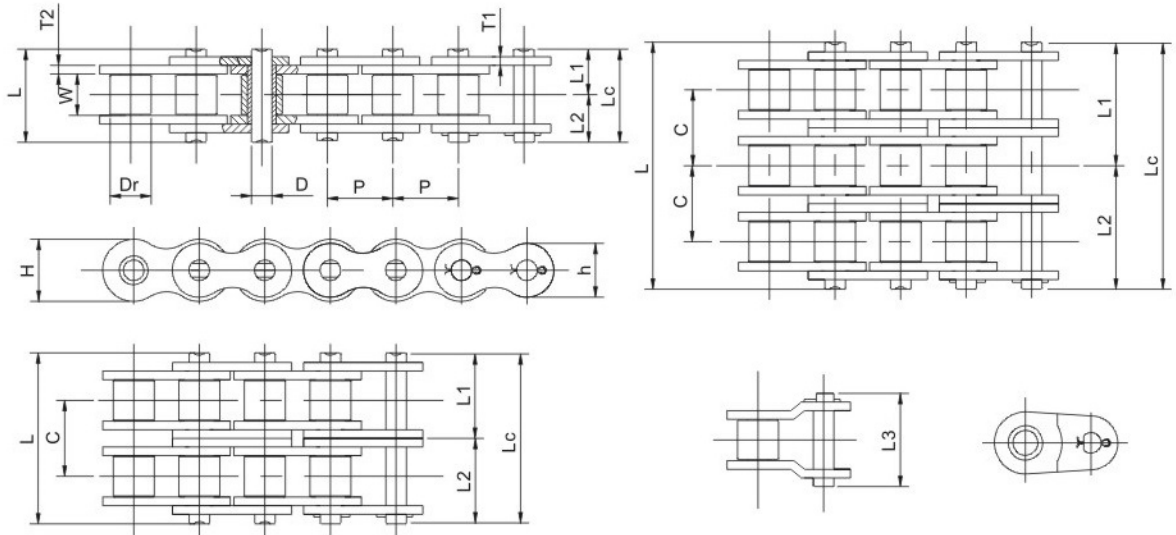

48B		General Dimensions					Unit : mm			
ISO Chain NO.	DIN Chain NO.	Pitch	Roller Diameter max	Width Between Inner Plates min	Pin Diameter max	Plate Thickness max		Inner Plate Depth max	Outer Plate Depth max	
		P	Dr	W	D	T1	T2	H	h	
48B	48B	76.2	48.26	45.72	29.24	10.0	12.0	63.88	63.88	

Dimensions of strands						Unit : mm			
Chain NO.	Pin Length					Transverse Pitch	Average Tensile Strength	ISO Tensile Strength min	Weight Per Meter
	L max	Lc max	L1 max	L2 max	L3 max	C	KN	KN	Kg/m
48B-1	99.10	107.0	49.55	57.45	110.5	91.21	628.50	560.00	25.10
48B-2	190.40	198.2	95.20	103.00	201.9		1136.00	1000.00	50.20
48B-3	281.60	289.4	140.80	148.60	293.1		1716.00	1500.00	75.30