

STANDARD CHAIN

05B

General Dimensions


Unit : mm

ISO Chain NO.	DIN Chain NO.	Pitch	Roller Diameter max	Width Between Inner Plates min	Pin Diameter max	Plate Thickness max		Inner Plate Depth max	Outer Plate Depth max
		P	Dr	W	D	T1	T2	H	h
05B	05B	8.0	5.0	3.0	2.31	0.80	0.80	7.11	7.11

Dimensions of strands

Unit : mm

Chain NO.	Pin Length					Transverse Pitch C	Average Tensile Strength KN	ISO Tensile Strength min KN	Weight Per Meter Kg/m
	L max	Lc max	L1 max	L2 max	L3 max				
05B-1	8.60	9.10	4.30	4.80	9.90	5.64	5.75	4.40	0.19
05B-2	14.30	14.80	7.15	7.65	16.40		9.80	7.80	0.37
05B-3	19.90	20.40	9.95	10.45	22.00		13.60	11.10	0.49

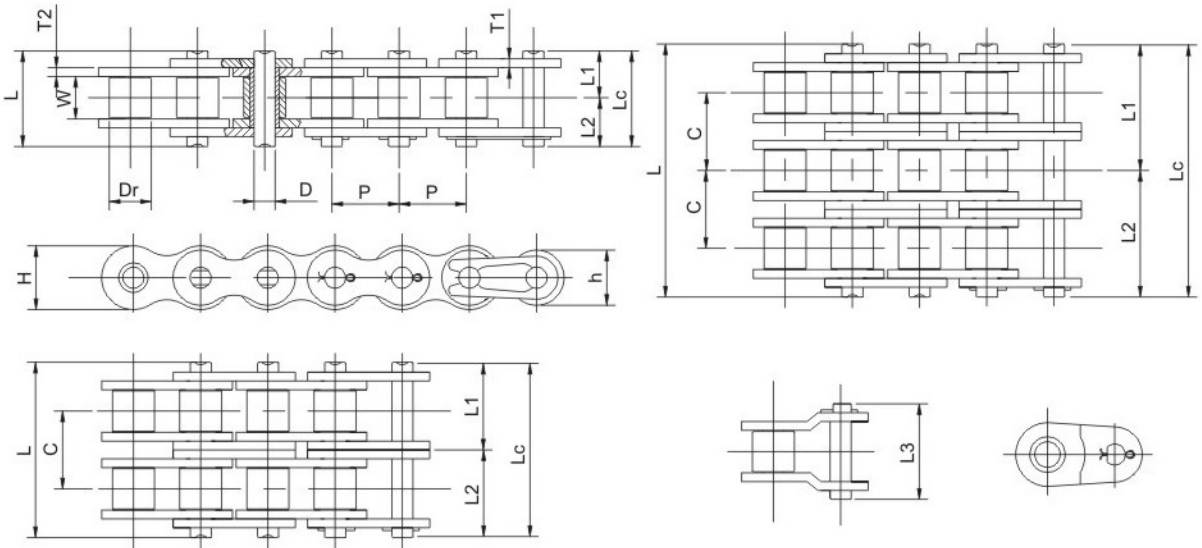

06B

General Dimensions

Unit : mm

ISO Chain NO.	DIN Chain NO.	Pitch	Roller Diameter max	Width Between Inner Plates min	Pin Diameter max	Plate Thickness max		Inner Plate Depth max	Outer Plate Depth max
		P	Dr	W	D	T1	T2	H	h
06B	06B	9.525	6.35	5.72	3.28	1.30	1.30	8.26	8.26

Dimensions of strands

Unit : mm

Chain NO.	Pin Length					Transverse Pitch C	Average Tensile Strength KN	ISO Tensile Strength min KN	Weight Per Meter Kg/m
	L max	Lc max	L1 max	L2 max	L3 max				
* 06B-1	13.50	14.40	6.75	7.65	14.60	10.24	9.80	8.90	0.44
* 06B-2	23.80	24.47	11.90	12.57	24.70		18.00	16.90	0.85
* 06B-3	34.00	34.50	17.00	17.50	34.70		28.80	24.90	1.26

★ Straight Side Bar Type