


# STANDARD CHAIN

08B		General Dimensions						Unit : mm	
ISO Chain NO.	DIN Chain NO.	Pitch	Roller Diameter max	Width Between Inner Plates min	Pin Diameter max	Plate Thickness max		Inner Plate Depth max	Outer Plate Depth max
		P	Dr	W	D	T1	T2	H	h
08B	08B	12.70	8.51	7.75	4.45	1.6	1.6	11.81	10.92

Dimensions of strands						Unit : mm			
Chain NO.	Pin Length					Transverse Pitch	Average Tensile Strength	ISO Tensile Strength min	Weight Per Meter
	L max	Lc max	L1 max	L2 max	L3 max	C	KN	KN	Kg/m
08B-1	17.00	18.50	8.50	10.00	18.80	13.92	18.60	17.80	0.75
08B-2	31.00	32.50	15.5	17.00	33.80		35.00	31.10	1.45
08B-3	44.90	46.40	22.45	23.95	47.80		48.80	44.50	2.15

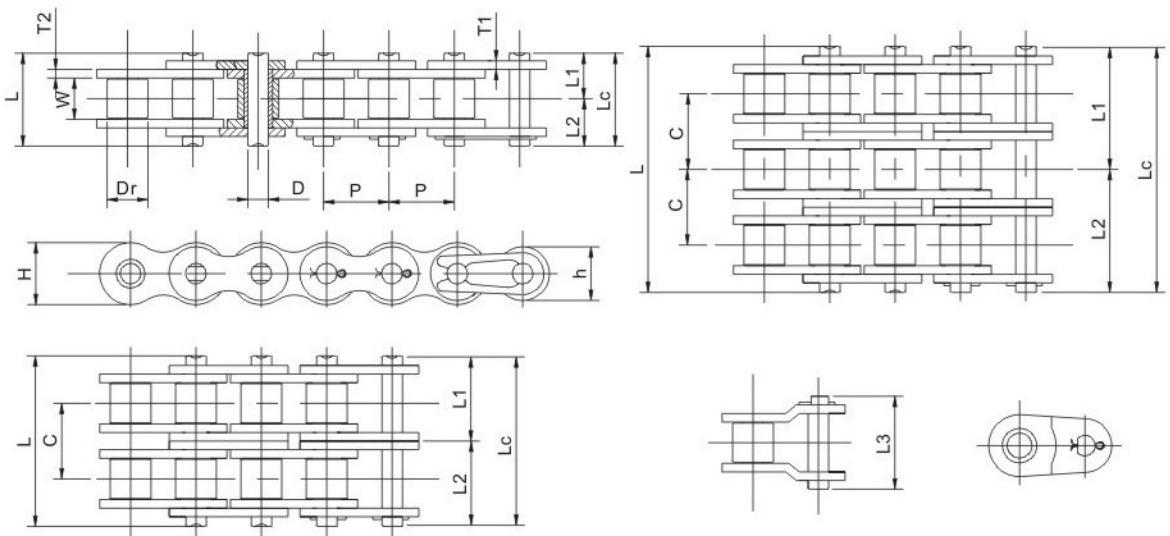

10B		General Dimensions						Unit : mm	
ISO Chain NO.	DIN Chain NO.	Pitch	Roller Diameter max	Width Between Inner Plates min	Pin Diameter max	Plate Thickness max		Inner Plate Depth max	Outer Plate Depth max
		P	Dr	W	D	T1	T2	H	h
10B	10B	15.875	10.16	9.65	5.08	1.7	1.7	14.73	13.72

Dimensions of strands						Unit : mm			
Chain NO.	Pin Length					Transverse Pitch	Average Tensile Strength	Tensile Strength min	Weight Per Meter
	L max	Lc max	L1 max	L2 max	L3 max	C	KN	KN	Kg/m
10B-1	19.60	21.05	9.80	11.25	21.35	16.59	25.60	22.20	1.05
10B-2	36.20	37.65	18.10	19.55	39.65		50.20	44.50	2.05
10B-3	52.80	54.20	26.40	27.80	56.30		75.80	66.70	3.15