


高 耐 磨 性

OCM SELUBE 自润滑链条




SELUBE 自润滑小型输送链条〔SER〕


A-1 形

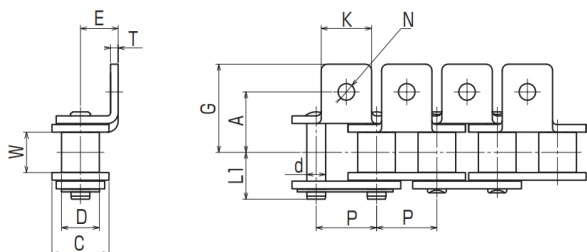


SA-1 形

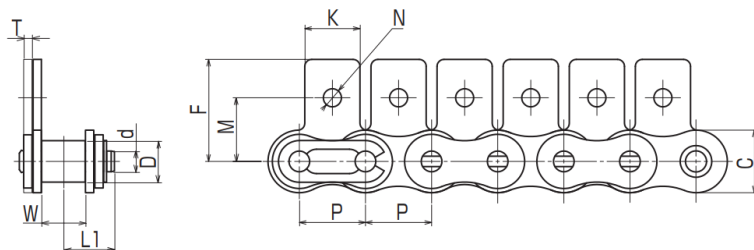

K-1 形

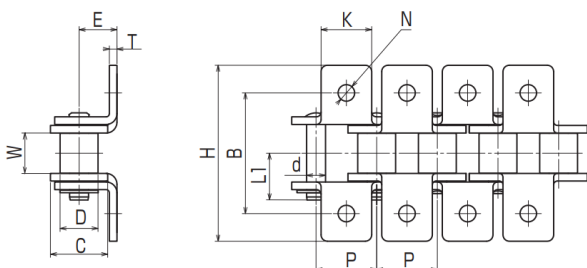

SK-1 形

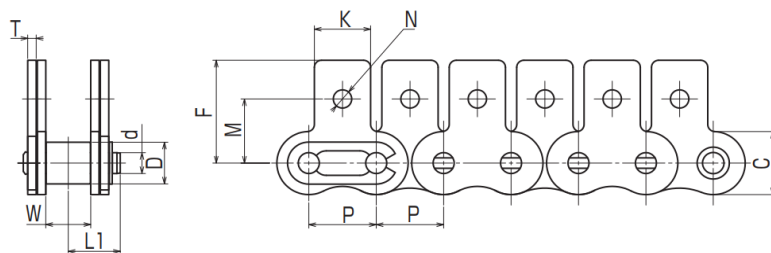

链号 Chain No.	节距 P	滚子 直径 D	内节 内宽 W	链 板		销 轴		平均抗拉强度		容许载荷		无附件 链条 估算重量 (kg/m)
				C	T	d	L1	kN	kgf	kN	kgf	
OCM 40-SER	12.70	7.92	7.95	12.0	1.5	3.96	9.7	15.69	1,600	2.75	280	0.66
OCM 50-SER	15.875	10.16	9.55	15.0	2.0	5.08	12.1	25.49	2,600	4.51	460	1.08
OCM 60-SER	19.05	11.91	12.70	18.0	2.4	5.95	14.7	37.26	3,800	6.27	640	1.6
OCM 80-SER	25.40	15.88	15.90	24.1	3.2	7.94	18.8	63.73	6,500	10.49	1,070	2.8
OCM100-SER	31.75	19.05	19.15	30.1	4.0	9.53	23.5	99.96	10,200	15.40	1,570	4.2
OCM120-SER	38.10	22.23	25.55	36.2	4.8	11.11	28.4	148.96	15,200	21.57	2,200	6.2

链号 Chain No.	A 形尺寸				K 形尺寸			SA, SK 形尺寸		单个附件 重量	
	K	N	A	E	G	(2A)B	(2G)H	M	F	A, SA (kg)	K, SK (kg)
OCM 40-SER	9.5	3.6	12.7	8.0	17.55	25.4	35.1	12.7	19.1	0.001	0.002
OCM 50-SER	12.7	5.2	15.9	10.3	23.1	31.8	46.2	15.95	25.25	0.004	0.008
OCM 60-SER	15.9	5.2	19.05	11.9	27.8	38.1	55.6	18.3	29.33	0.007	0.014
OCM 80-SER	19.1	6.8	25.4	15.9	32.4	50.8	64.8	24.6	34.7	0.011	0.022
OCM100-SER	25.4	8.8	31.75	19.8	43.65	63.5	87.3	31.8	43.3	0.023	0.046
OCM120-SER	28.6	10.5	38.1	23.0	54.25	76.2	108.5	36.5	51.6	0.038	0.076

