


STANDARD CHAIN

20B		General Dimensions						Unit : mm	
ISO Chain NO.	DIN Chain NO.	Pitch	Roller Diameter max	Width Between Inner Plates min	Pin Diameter max	Plate Thickness max		Inner Plate Depth max	Outer Plate Depth max
		P	Dr	W	D	T1	T2	H	h
20B	20B	31.75	19.05	19.56	10.19	3.7	4.6	26.42	26.42

Dimensions of strands						Unit : mm			
Chain NO.	Pin Length					Transverse Pitch	Average Tensile Strength	ISO Tensile Strength min	Weight Per Meter
	L max	Lc max	L1 max	L2 max	L3 max				
20B-1	43.20	44.67	21.60	23.07	48.57	36.45	108.60	95.00	3.99
20B-2	79.70	81.07	39.85	41.22	86.57		208.40	170.00	7.93
20B-3	116.10	117.40	58.05	59.35	123.15		285.30	250.00	11.82

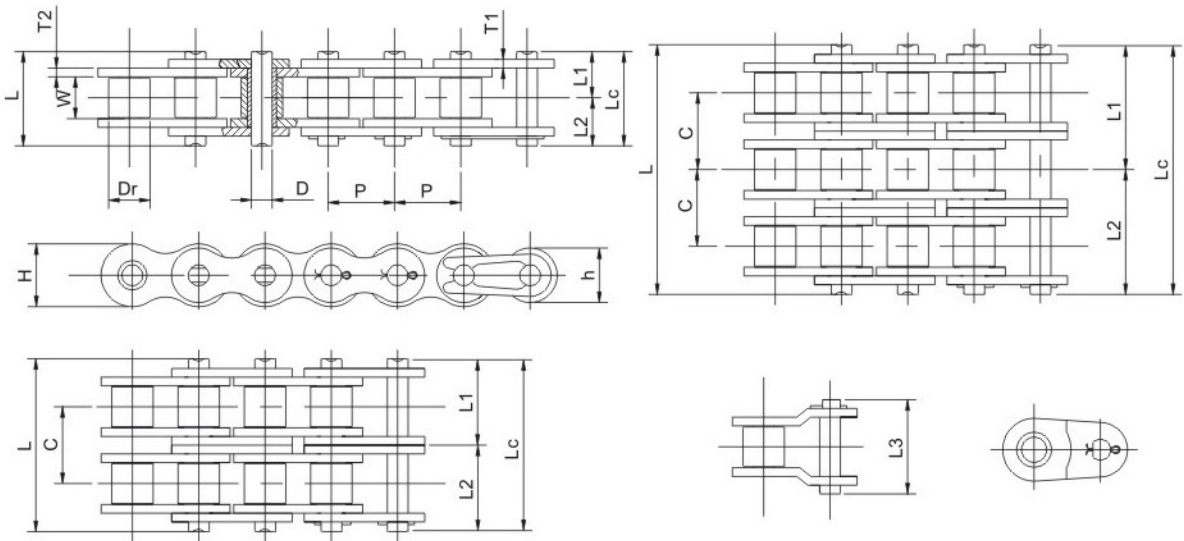

24B		General Dimensions						Unit : mm	
ISO Chain NO.	DIN Chain NO.	Pitch	Roller Diameter max	Width Between Inner Plates min	Pin Diameter max	Plate Thickness max		Inner Plate Depth max	Outer Plate Depth max
		P	Dr	W	D	T1	T2	H	h
24B	24B	31.80	25.40	25.40	14.63	4.9	6.0	33.4	33.4

Dimensions of strands						Unit : mm			
Chain NO.	Pin Length					Transverse Pitch	Average Tensile Strength	ISO Tensile Strength min	Weight Per Meter
	L max	Lc max	L1 max	L2 max	L3 max				
24B-1	53.4	58.20	26.70	31.5	62.3	48.36	176.80	160.00	7.55
24B-2	101.8	106.65	50.9	55.75	112.95		322.60	280.00	14.75
24B-3	150.2	155.2	75.1	80.1	161.5		489.50	425.00	21.90