


STANDARD CHAIN

200		General Dimensions						Unit : mm	
ISO Chain NO.	ANSI Chain NO.	Pitch	Roller Diameter max	Width Between Inner Plates min	Pin Diameter max	Plate Thickness max		Inner Plate Depth max	Outer Plate Depth max
		P	Dr	W	D	T1	T2	H	h
40A	200	63.50	39.68	37.85	19.85	8.0	8.0	60.33	52.07

Dimensions of strands						Unit : mm			
Chain NO.	Pin Length					Transverse Pitch	Average Tensile Strength	ISO Tensile Strength min	Weight Per Meter
	L max	Lc max	L1 max	L2 max	L3 max	C	KN	KN	Kg/m
200-1	80.30	84.95	40.15	44.80	88.45	71.55	456.00	347.00	16.52
200-2	151.90	156.60	75.95	80.65	162.40		912.00	639.90	32.69
200-3	223.50	228.20	111.75	116.45	234.00		1368.00	1040.90	49.11
200-4	295.20	299.90	147.60	152.30	305.70		1824.00	—	65.29
200-5	366.90	371.65	183.45	188.20	377.45		2280.00	—	82.48
200-6	438.60	443.35	219.30	224.05	449.15		2736.00	—	97.77

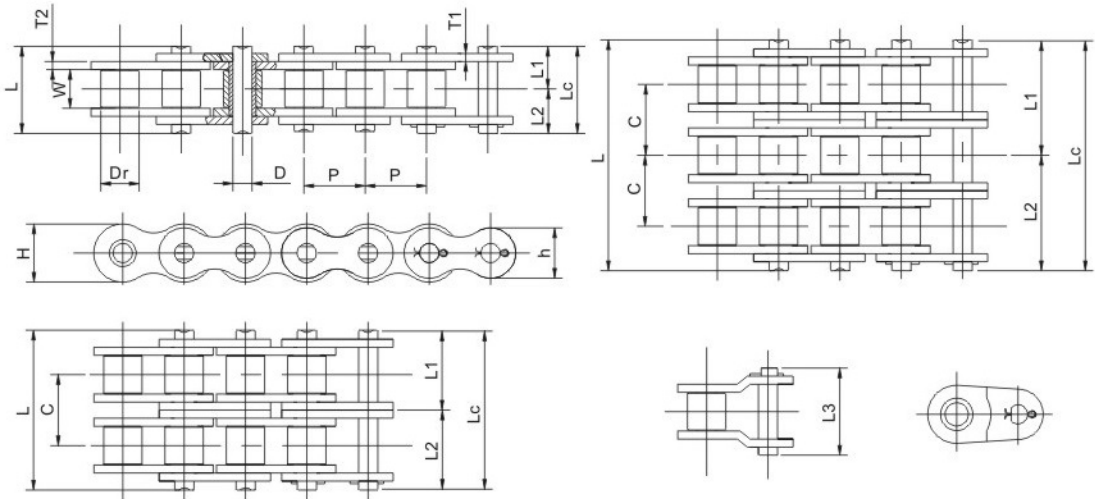

240		General Dimensions						Unit : mm	
ISO Chain NO.	ANSI Chain NO.	Pitch	Roller Diameter max	Width Between Inner Plates min	Pin Diameter max	Plate Thickness max		Inner Plate Depth max	Outer Plate Depth max
		P	Dr	W	D	T1	T2	H	h
48A	240	76.2	47.63	47.35	23.81	9.5	9.5	72.39	62.48

Dimensions of strands						Unit : mm			
Chain NO.	Pin Length					Transverse Pitch	Average Tensile Strength	ISO Tensile Strength min	Weight Per Meter
	L max	Lc max	L1 max	L2 max	L3 max	C	KN	KN	Kg/m
240-1	90.50	100.75	45.25	55.5	104.25	87.83	627.00	500.40	24.53
240-2	183.40	191.10	91.70	99.40	198.30		1254.00	1000.80	48.16
240-3	271.30	278.80	135.65	143.15	286.00		1881.00	1501.30	71.69
240-4	359.20	366.90	179.60	187.30	374.10		2508.00	—	95.22
240-5	447.10	454.80	223.55	231.25	462.00		3135.00	—	118.75
240-6	535.00	542.60	267.50	275.10	549.80		3762.00	—	142.28