





DOUBLE PITCH CHAIN WITH ATTACHMENT

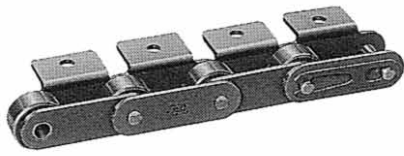


TYPE A-1.2

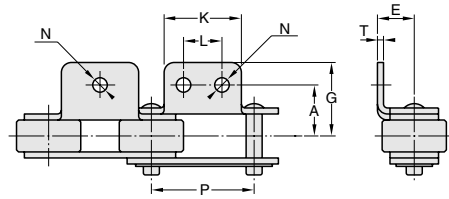


TYPE K-1.2

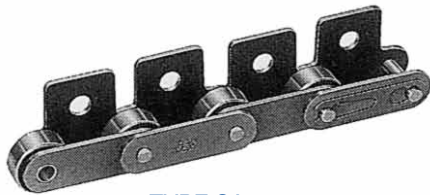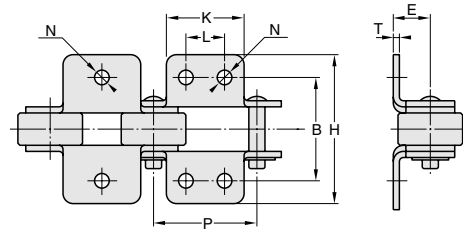

TYPE SA-1.2

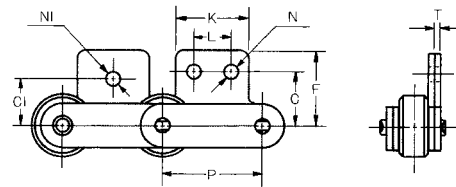

TYPE SK-1.2

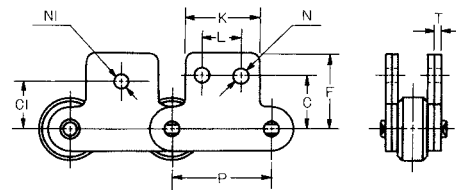

UNIT Upper:inch
Beneath:mm

OCM Chain No.	Pitch P	Link Plate T	(BA·BK·SA·SK) Attachment												Additional Weight Per Attachment Lb/kg	
			(2A)						(2G)							
			K	N	L	A	E	G	B	H	C	F	C1	N1	BA·SA	BK·SK
C2040-C2042	1.000	0.059	0.752	0.142	0.374	0.500	0.358	0.780	1.000	1.559	0.531	0.807	0.437	0.205	0.007	0.013
	25.4	1.5	19.1	3.6	9.5	12.7	9.1	19.8	25.4	39.6	13.5	20.5	11.1	5.2	0.003	0.006
C2050-C2052	1.250	0.079	0.937	0.205	0.469	0.626	0.437	0.965	1.252	1.929	0.626	0.984	0.563	0.268	0.013	0.026
	31.75	2	23.8	5.2	11.9	15.9	11.1	24.5	31.8	49	15.9	25	14.3	6.8	0.006	0.012
C2060H-C2062H	1.500	0.126	1.126	0.205	0.563	0.843	0.579	1.240	1.685	2.480	0.752	1.295	0.689	0.346	0.037	0.075
	38.1	3.2	28.6	5.2	14.3	21.4	14.7	31.5	42.8	63	19.1	32.9	17.5	8.8	0.017	0.034
C2080H-C2082H	2.000	0.157	1.500	0.268	0.752	1.094	0.752	1.602	2.189	3.205	1.000	1.713	0.874	0.413	0.082	0.163
	50.8	4	38.1	6.8	19.1	27.8	19.1	40.7	55.6	81.4	25.4	43.5	22.2	10.5	0.037	0.074
C2100H-C2102H	2.500	0.189	1.874	0.346	0.937	1.311	0.921	1.965	2.622	3.929	1.252	2.106	1.126	0.551	0.154	0.309
	63.5	4.8	47.6	8.8	23.8	33.3	23.4	49.9	66.6	99.8	31.8	53.5	28.6	14	0.07	0.14
C2120H-C2122H	3.000	0.220	2.252	0.413	1.126	1.563	1.094	2.390	3.126	4.780	1.469	2.480	1.311	0.630	0.254	0.507
	76.2	5.6	57.2	10.5	28.6	39.7	27.8	60.7	79.4	121.4	37.3	63	33.3	16	0.115	0.23
C2160H-C2162H	4.000	0.283	3.000	0.551	1.500	2.063	1.437	3.028	4.126	6.055	2.000	3.012	1.752	0.827	0.5	1.001
	101.6	7.2	76.2	14	38.1	52.4	36.5	76.9	104.8	153.8	50.8	76.5	44.5	21	0.227	0.454

Stainless attachment chain is available.