
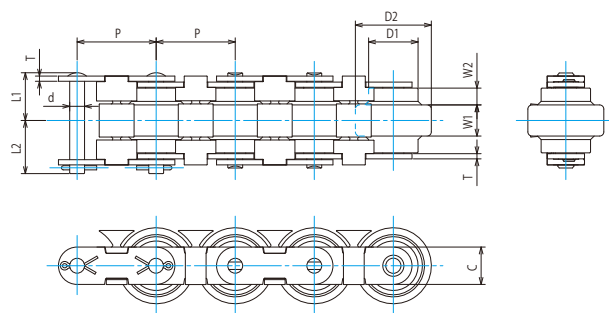


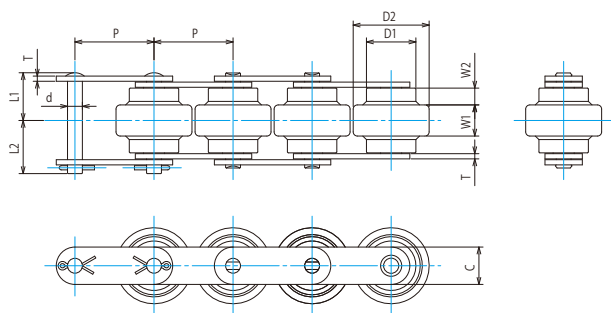

OCM BAI-SPEED CHAIN Model Number Indication

C2030-VS-A

CHAIN No. BAI-SPEED

Type of Engineering Plastic Roller

A:Standard
B:Standard/High Friction/Noiseless
C:Electro Conductive
D:Electro Conductive/High Friction/Noiseless

C2030-VS-A-SF

CHAIN No. BAI-SPEED


Safety Finger(SF)Clip

Type of Engineering Plastic Roller

A:Standard
B:Standard/High Friction/Noiseless
C:Electro Conductive
D:Electro Conductive/High Friction/Noiseless

Upper: inch
Beneath: mm

OCM Chain No.	Pitch	Roller Diam.		Roller Width		Plate		Pin			Allowable Tension		Approx Weight Lb/ft kg/m
	P	D1	D2	W1	W2	H	T	d	L1	L2	Roller A. C kgf	Roller B. D kgf	
C2030-VS	0.750 19.05	0.469 11.91	0.720 18.3	0.295 7.5	0.159 4.05	0.354 9	0.049 1.25	0.141 3.58	0.453 11.5	0.504 12.8	56	—	0.370 0.55
C2040-VS	1.000 25.4	0.625 15.88	0.984 25	0.366 9.3	0.240 6.1	0.472 12	0.059 1.5	0.156 3.96	0.600 15.25	0.695 17.65	90	45	0.672 1.0
C2050-VS	1.250 31.75	0.750 19.05	1.205 30.6	0.433 11	0.299 7.6	0.591 15	0.079 2.0	0.200 5.08	0.756 19.2	0.843 21.4	140	70	0.874 1.3
C2060-VS	1.500 38.1	0.875 22.23	1.441 36.6	0.590 15	0.323 8.2	0.677 17.2	0.126 3.2	0.234 5.95	0.957 24.3	1.043 26.5	210	105	1.546 2.3



Upper: inch
Beneath: mm

OCM Chain No.	Type	Number of teeth	PD	OD	T	HD	BD	BL	M	Weight Lb/pc kg/pc
C2030-VS	B	10	2.427 61.65	2.480 63	0.118 3	0.591 15	1.457 37	0.984 25	0.602 15.3	0.661 0.3
C2040-VS	B	10	3.236 82.2	3.661 93	0.157 4	0.669 17	2.047 52	1.575 40	0.803 20.4	1.764 0.8
C2050-VS	B	10	4.045 102.75	4.606 117	0.197 5	0.787 20	2.598 66	1.772 45	1.004 25.5	3.307 1.5
C2060-VS	B	10	4.854 123.3	5.394 137	0.236 6	0.787 20	3.189 81	1.969 50	1.201 30.5	5.512 2.5