
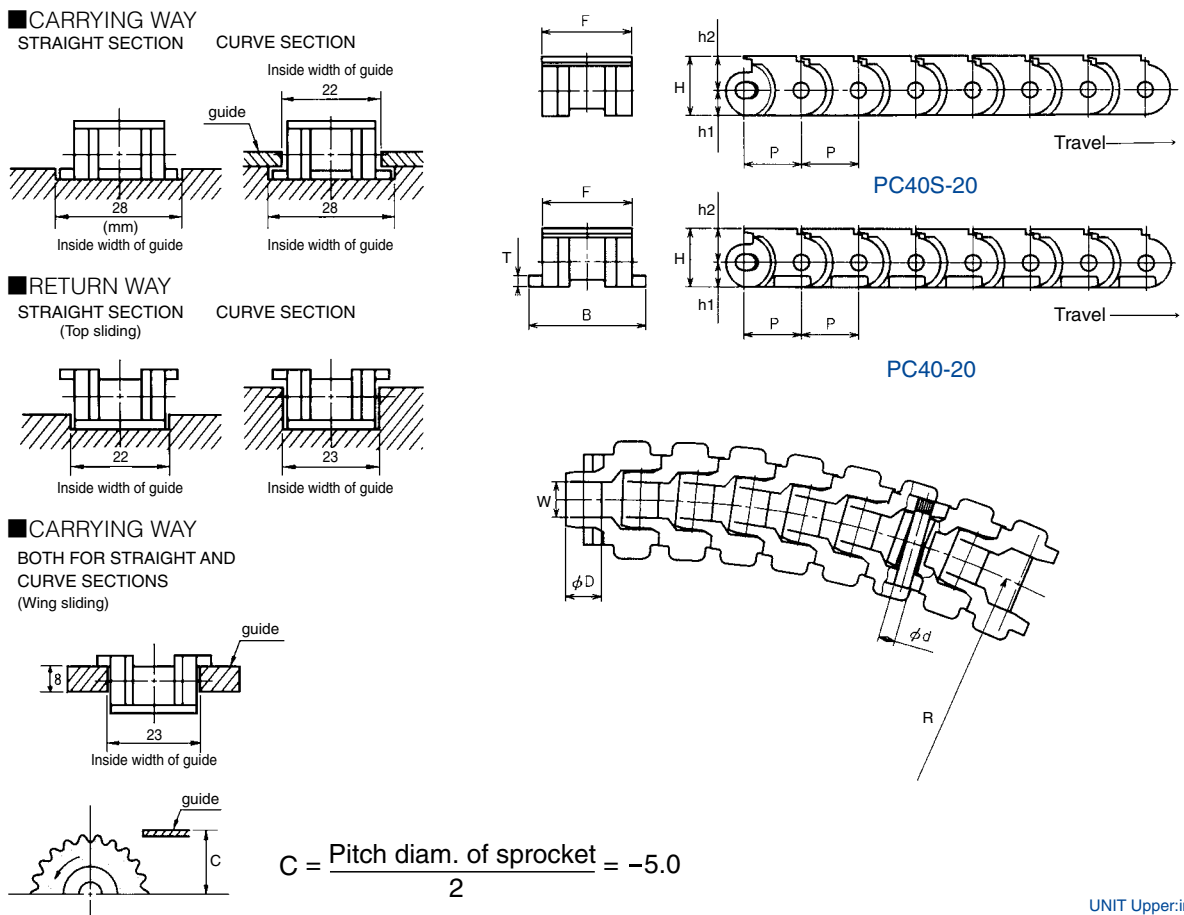


PLACURVE CHAIN

Placurve chain, made of plastic and stainless steel pin, can sideflex.
 No lubrication, light in weight, clean and less noise.
 Suitable for conveying bottles, paper bags, small products, food processing.
 Chain can operate on ANSI standard sprockets.
 Operatable temperature: -10°C~70°C
 Chain speed should be less than 60M/min.
 Material: Polyacetal
 PC40S-20 has no wing and is for straight line running.

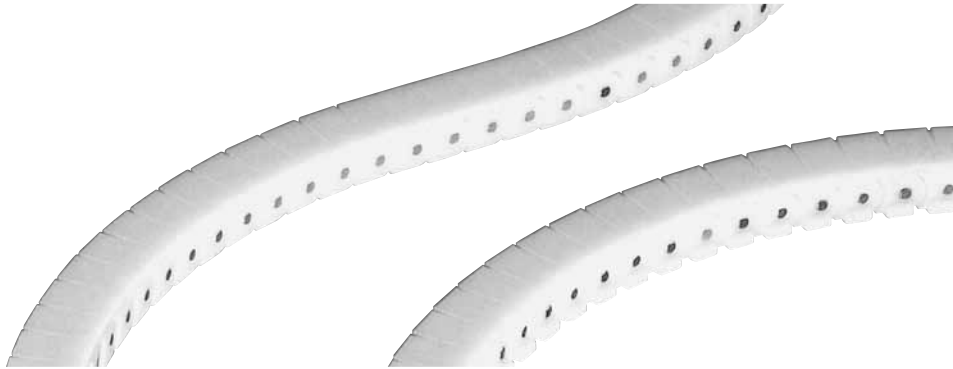

UNIT Upper:inch
 Beneath:mm

OCM Chain No.	Pitch	Roller Diam.	Width between L.P.		Link Plate			Pin Diam.	Link Plate			Min Sideflex Radius	Max Working Load	Approx Weight
	P	D	W	h1	h2	H	d	F	T	B	R	Lb/kgf	kg/m	
PC40-20	0.5	0.312	0.313	0.217	0.295	0.512	0.141	0.787	0.098	1.024	7.874	105.821	0.229	
	12.7	7.92	7.95	5.5	7.5	13	3.58	20	2.5	26	200	48	0.34	
PC40S-20	0.5	0.312	0.313	0.217	0.295	0.512	0.141	0.787	-	-	(200)	105.821	0.223	
	12.7	7.92	7.95	5.5	7.5	13	3.58	20	-	-	-	48	0.33	