


DOUBLE PITCH TRANSMISSION CHAIN

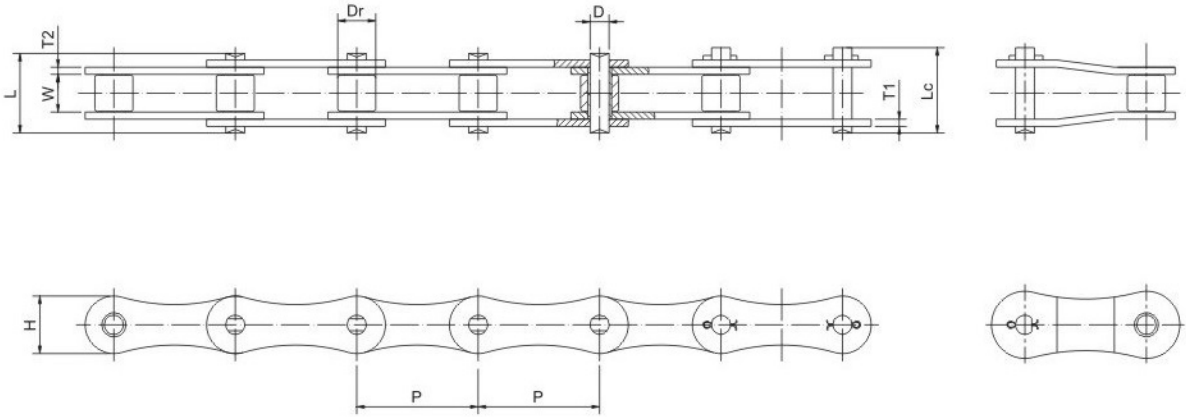

Chain NO.	ANSI Chain NO.	Pitch	Roller Dia-meter	Width Between Inner Plates	Pin Dia-meter	Pin Length		Inner Plate Depth Max	Plate Thickness		Ultimate Tensile Strength	Average Tensile Strength	Weight Per Meter
		P	Dr max	W min	D max	Lc max	L3 max	H max	T1 max	T2 max	min	KN	Kg/m
		mm	mm	mm	mm	mm	mm	mm	mm	mm	KN		
208A	2040	25.4	7.92	7.85	3.98	17.80	19.80	12.07	1.5	1.5	13.8	17.80	0.45
210A	2050	31.75	10.16	9.40	5.09	21.80	23.80	15.09	2.03	2.03	21.8	29.20	0.75
212A	2060	38.10	11.91	12.57	5.96	26.9	29.40	18.08	2.42	2.42	31.1	41.60	1.05
216A	2080	50.8	15.88	15.75	7.94	33.5	36.50	24.13	3.25	3.25	55.6	72.00	1.75
220A	2100	63.5	19.05	18.90	9.54	41.10	44.60	30.18	4.0	4.0	86.7	110.20	2.60
224A	2120	76.2	22.23	25.22	11.11	50.80	54.80	36.20	4.8	4.8	124.6	157.2	4.1
208B		25.4	8.51	7.75	4.45	17.00	19.00	11.81	1.60	1.60	17.80	18.60	0.48
210B		31.75	10.16	9.65	5.08	19.60	21.60	14.73	1.70	1.70	22.20	25.60	0.68
212B		38.10	12.07	11.68	5.72	22.70	25.2	16.13	1.85	1.85	28.90	30.30	0.79
216B		50.8	15.88	17.02	8.28	36.10	39.10	21.08	3.10	4.15	60.00	68.60	1.80
220B		63.5	19.05	19.56	10.19	43.20	46.70	26.42	3.70	4.60	95.00	108.60	2.65
224B		76.2	25.40	25.40	14.63	53.40	58.40	33.40	5.20	6.00	160.00	176.80	4.75
228B		88.9	27.94	30.99	15.90	65.10	70.60	37.08	6.30	7.50	200.00	223.00	6.25
232B		101.6	29.21	30.99	17.81	67.40	73.40	42.29	6.30	7.00	250.00	278.20	6.75