


STEEL AGRICULTURAL CHAINS(S SERIES)



ANSI Chain NO.	Pitch	Roller Dia-meter	Width Between Inner Plates	Pin Dia-meter	Pin Length		Inner Plate Depth Max	Plate Thickness	Ultimate Tensile Strength	Average Tensile Strength	Weight Per Meter
	P	Dr max	W min	D max	Lc max	L3 max	H max	T max	min	KN	Kg/m
	mm	mm	mm	mm	mm	mm	mm	mm	KN		
S32	29.21	11.43	15.88	4.47	26.7	28.6	13.5	1.8	8.0	20.00	0.88
S42	34.93	14.27	19.05	7.01	34.3	37.8	19.8	2.8	26.7	48.00	1.62
S45	41.40	15.24	22.23	5.74	37.8	40.35	17.3	2.8	17.8	35.00	1.66
S52	38.10	15.24	22.23	5.74	37.0	39.6	17.3	2.8	17.8	35.00	1.68
S55	41.40	17.78	22.23	5.74	37.8	40.35	17.3	2.8	17.8	35.00	1.80
S62	41.91	19.05	25.40	5.74	40.3	42.8	17.3	2.5	26.70	30.00	1.87
S77	58.34	18.26	22.23	8.92	43.2	46.4	26.2	4.0	44.50	68.00	2.66
S88	66.27	22.86	28.58	8.92	50.2	53.25	25.2	4.0	44.50	68.00	3.25
S55H	41.4	17.78	22.23	8.28	39.0	42.0	21.0	3.0	35.0	42.0	2.25
S55RH	41.4	17.78	22.23	8.90	43.2	46.4	22.4	4.0	65.0	84.5	2.74
S62HD	41.91	19.05	25.4	5.74	40.0	42.1	17.3	2.62	37.0	44.5	2.30
55V	41.4	17.78	22.6	8.28	39.3	42.0	20.0	3.0	42.0	45.0	2.22
S38	38.0	16.0	21.8	9.0	39.0	43.0	21.0	3.0	44.50	55.00	2.00

S38 Chain Attachment Location

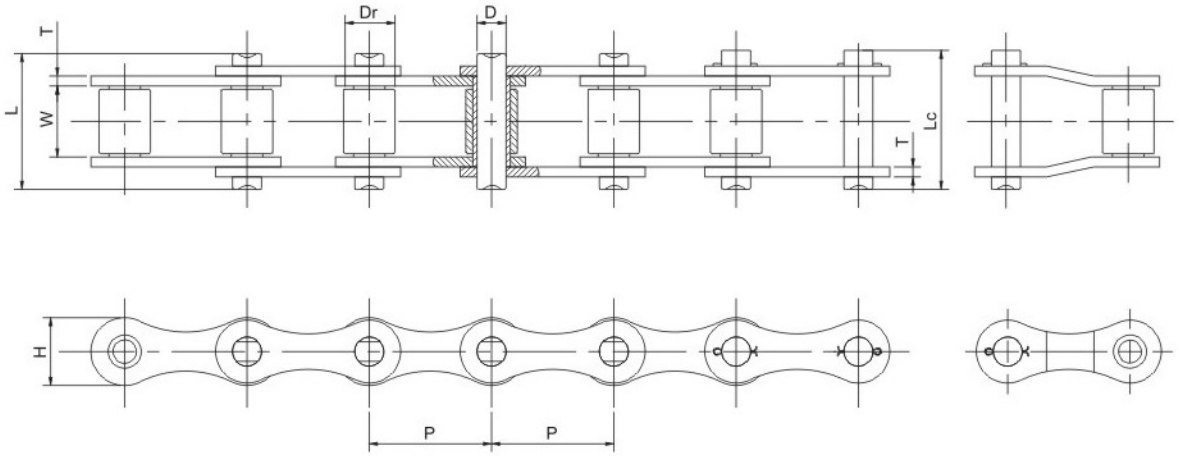