


DOUBLE PITCH LARGE ROLLER CONVEYOR CHAINS

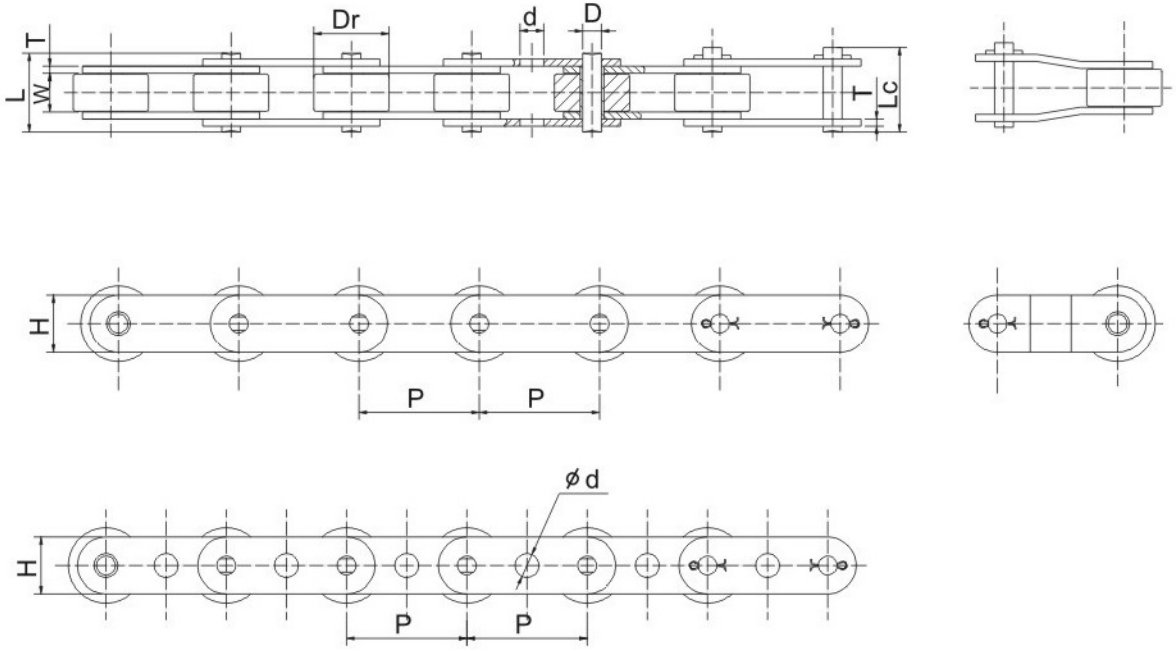

DIN ISO Chain No.	ANSI Chain No.	Pitch	Roller Diameter	Width Between Inner Plates	Pin Diameter	Center Hole Diameter	Pin Length		Inner Plate Depth	Plate Thickness	ISO Tensile Strength	Average Tensile Strength	Weight Per Meter
		P mm	Dr max mm	W min mm	D max mm	d mm	L max mm	Lc max mm	H max mm	T max mm	min KN	KN	Kg/m
C208AL	C2042	25.4	15.88	7.85	3.98	17.80	19.80	12.07	1.5	4.10	13.80	17.80	0.86
C210AL	C2052	31.75	19.05	9.40	5.09	21.8	23.80	15.09	2.03	5.20	21.80	29.20	1.29
C212AL	C2062	38.10	22.23	12.57	5.96	26.9	29.4	18.08	2.42	6.10	31.10	41.60	1.65
C216AL	C2082	50.80	28.58	15.75	7.94	33.5	36.5	24.13	3.25	8.1	55.60	72.00	3.15
C220AL	C2102	63.50	39.67	18.90	9.54	41.1	44.6	30.18	4.00	9.7	86.70	110.20	4.88
C224AL	C2122	76.20	44.45	25.22	11.11	50.8	54.8	36.20	4.80	11.3	124.60	157.20	7.69
C232AL	C2162	101.60	57.15	31.55	14.29	65.5	70.5	48.26	6.40	14.5	222.40	275.00	12.00
C208AHL	C2042H	25.4	15.88	7.85	3.98	20.10	22.10	12.07	2.03	4.10	13.80	17.80	1.08
C210AHL	C2052H	31.75	19.05	9.40	5.09	23.80	25.80	15.09	2.42	5.20	21.80	29.20	1.63
C212AHL	C2062H	38.10	22.23	12.57	5.96	30.40	32.90	18.08	3.25	6.10	31.10	41.60	2.10
C216AHL	C2082H	50.80	28.58	15.75	7.94	36.70	39.70	24.13	4.00	8.10	55.60	72.00	3.62
C220AHL	C2102H	63.50	39.67	18.90	9.54	44.50	48.0	30.18	4.80	9.7	86.70	110.20	5.40
C224AHL	C2122H	76.20	44.45	25.22	11.11	54.20	58.20	36.20	5.60	11.3	124.60	157.20	8.30
C232AHL	C2162H	101.60	57.15	31.55	14.29	68.70	73.70	48.26	7.15	14.5	222.40	275.00	12.90